

揭阳市领界电子有限公司

JIEYANG LINGJIE ELECTRONICS CO., LTD.



承 认 书

SPECIFICATION FOR APPROVAL

客户 Customer:	
产品名称Customer:	CD贴片电感
型号规格Customer:	CD75-1.5MH
承认书日期 Date:	2025. 09. 04

CUSTOMER AUTHORIZED 客 户 承 认 签 章		
Approved By 批准	Checked By 审核	Admitde By 审核

SUPPLIER AUTHORIZED 供 方 承 认 签 章		
Approved By 批准	Checked By 审核	Prepared By 拟制
黄春葵	杨晓	蔡冰

揭阳市领界电子有限公司

地址：揭阳市榕城区凤美街道万洋科技众创城 7 栋 6 楼

电话：13686801482

请签字盖章后，回传一份承认书给我司。

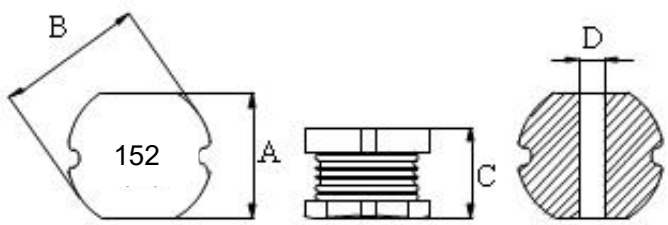
Please return to us one copy of "SPECIFICAITON FOR APPROVAL" with your approved.



规格书/SPECIFICATIONs

揭阳市领界电子有限公司/JIEYANGSHI LINGJIE DIANZIYOUXIANGONSI

SPECIFICATION FOR APPROVAL样品承认书

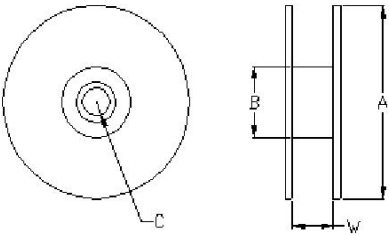
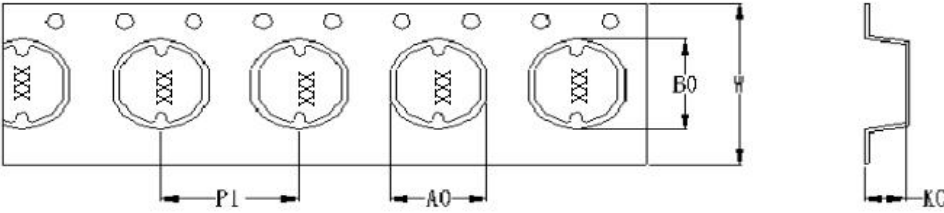
CUSTOMER (客户):		PAGE: 1 OF 3	
ITEM: CD54-1R0		Customer's ITEM:	
Item 项目	Spec.(mm) 规格值	1. MECHANICAL DIMENSIONS(外形尺寸): 	
A	7.8 ± 0.3mm		
B	7.0± 0.3mm		
C	5.0± 0.5mm		
D	3.0Ref.		
Marking (印字): “152”			
2. ELECTRICAL CHARACTERISTICS(电特性要求):			
ITEM (项目)	Specifications(规格值)	Test condition	Test equipments(测试仪器)
L	1.5MH±20%	100Khz/0.25V	CH1062, CH502BC, 301A
DCR	7.83Ωmax	at 25°C	DCR TEST METER 1063A
IDC	Isat=0.24A Ln=Lower than L by 25%		DC BIAS METER VR115+7205
Ope.Temp.	-40°C TO 85°C		
Storage.Temp.	-40°C TO 125°C		
Other1	产品需印字“152”		
Other1	包装方式: 编带		
CUSTOMER APPROVED(客户确认栏)		APPROVED(确认)	CHECKED(检查)
		蔡冰	黄春葵
			杨晓
ISSUED DATE(出版日期): 2025-9-04		版次: 1.0	

COIL INSPECTION REPORT样品检测记录



规格书/SPECIFICATIONS

揭阳市领界电子有限公司/JIEYANGSHI LINGJIE DIANZIYOUXIANGONSI

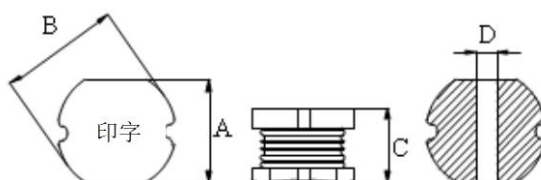
CUSTOMER (客户) :				PAGE: 2 OF 3																															
3.MATERIALS (材料) :			Customer's ITEM:																																
NO.	DESCRIPTION	MATERIAL		MANUFACTURER																															
a.	CORE	DR5.8*4.5 B2.5 F2.4		SCHEMATIC:																															
b.	TIN	99.3Sn/0.7Cu																																	
c.	INK	7224 BLACK																																	
d.	CLEANING AGENT	TF-20B																																	
e.	FLUX	TC997																																	
4.Packing Information: (包装信息)																																			
<table border="1"><thead><tr><th colspan="3">Dimenious of reel (mm)</th><th colspan="3">Packing Unit</th></tr><tr><th>Style</th><th>A</th><th>B</th><th>C</th><th>W</th><th>Packing Unit</th></tr></thead><tbody><tr><td>CD75</td><td>330</td><td>100</td><td>13</td><td>16.0</td><td>1000pcs/reel</td></tr></tbody></table> <table border="1"><thead><tr><th>STYLE</th><th>W</th><th>A0</th><th>B0</th><th>P1</th><th>K0</th></tr></thead><tbody><tr><td>CD75</td><td>16.0MM</td><td>8.2MM</td><td>7.5MM</td><td>12.0MM</td><td>N/A</td></tr></tbody></table>						Dimenious of reel (mm)			Packing Unit			Style	A	B	C	W	Packing Unit	CD75	330	100	13	16.0	1000pcs/reel	STYLE	W	A0	B0	P1	K0	CD75	16.0MM	8.2MM	7.5MM	12.0MM	N/A
Dimenious of reel (mm)			Packing Unit																																
Style	A	B	C	W	Packing Unit																														
CD75	330	100	13	16.0	1000pcs/reel																														
STYLE	W	A0	B0	P1	K0																														
CD75	16.0MM	8.2MM	7.5MM	12.0MM	N/A																														
ISSUED DATE(出版日期): 2025-9-04																																			
版次: 1.0																																			



规格书/SPECIFICATIONS

揭阳市领界电子有限公司/JIEYANGSHI LINGJIE DIANZIYOUXIANGONSI

COIL INSPECTION REPORT样品检测记录

CUSTOMER(客户):				PAGE: 3 OF 3		
ITEM: CD75-1.5MH		Customer's ITEM:				
DATE(测试日期): 2025-09-04						
QUANTITY(数量): 5 PCS						
TEST Freq.(测试频率): L:@100kHz 0.25V						
温度范围: :-40℃----+125℃						
ITEM(项目)	L	DCR (Ω)	IDC (A)	A	B	C
SPEC(规格)	1.5MH±20%	7.830	0.24	7.8	7	5
MAX(上限)						
MIN(下限)						
1	1.50	0.720		7.9	7	4.90
2	1.52	0.730		8	7.1	4.80
3	1.51	0.710		8.1	7.30	5.10
4	1.51	0.740		7.7	7.2	5.00
5	1.50	0.720		7.80	7.10	4.90
6						
7						
8						
9						
10						
X(平均值)	1.508	0.72		7.900	7.140	4.940
R(相对值)	0.020	0.03		0.400	0.300	0.300
JUD.(判别)	OK	OK		OK	OK	OK
TEST EQUIPMENTS(测试仪器):						
L : LCR TEST MEATER 2817B						
DCR : DCR TEST METER 1063A						
				APPROVED	CHECKED	
					黄春葵	